

Series 2, Wall-mounted canopy rangehood, 60 cm, Stainless steel DWP66BC50A



DHZ1224	Chimney extension 500 mm
DHZ1234	Chimney extension 750 mm
DHZ5275	Standard recirculation kit
DHZ5276	Standard odor filter (replacement)
DHZ6550	Brushed steel back panel
DHZ6551	Brushed steel back panel

Canopy hood: perfect performance matching your kitchen.

- **Grease filtration level:** filters out over 85% of the grease from kitchen air
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.**
- **Dishwasher-safe metal grease filters for easy cleaning.**
- **3-Speed Power Level Options To Suit Your Cooking Style And Recipes**

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 553-730/573-730 mm
 Height of product, without chimney: 246 mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight:8.7 kg
 Type of control:mechanical
 Number of power settings:3
 Max. air extraction: 598 m³/h
 Max. air recirculation: 406 m³/h
 Number of lights: 2
 Noise level:69 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242005100637
 Connection rating: 220 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: AU plug
 Installation typology:Wall-mounted



4 242005 100637

Series 2, Wall-mounted canopy rangehood, 60 cm, Stainless steel DWP66BC50A

**Canopy hood: perfect performance
matching your kitchen.**

Design & Innovation

- Pyramid design
- Appliance colour: Stainless steel


Power and Mode of Operation

- Accessory required for recirculation mode: Standard recirculation kit
- 3 power settings via Push button
- Extraction rate exhaust air according to EN 61591: max. 597 m³/h
- Extraction rate in recirculation mode:
 - Max. normal use: 406 m³/h
- Suitable for ducted or re-circulated extraction
- Push button for power and light
- Twin channel high performance fan motor
- Noise min./max. Normal Level: 49/69 dB
- Noise level in recirculation mode:
 - Max. normal use: 75 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)

Comfort & Convenience

- Dishwasher safe metal grease filters
- 2 x 1.5W LED
- with one-way flap: prevents outside air from entering your kitchen
- Appliance width: 600 mm
- Dimensions exhaust air (HxWxD): 799-975 x 600 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 600 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m


Series 2, Wall-mounted canopy rangehood, 60 cm, Stainless steel DWP66BC50A

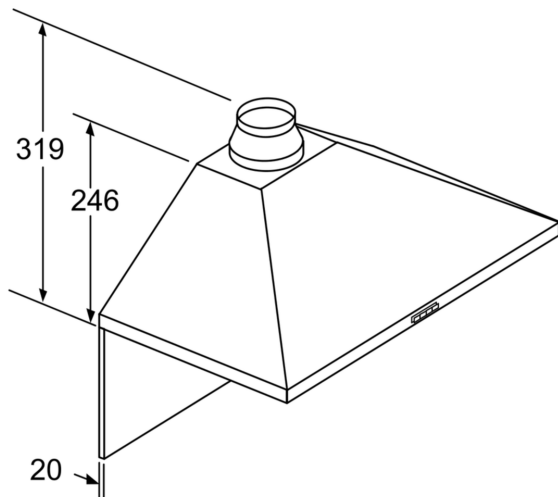

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

Measurements in mm

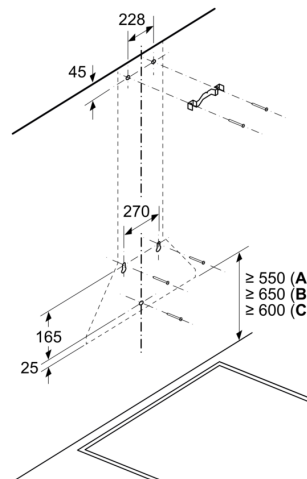


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

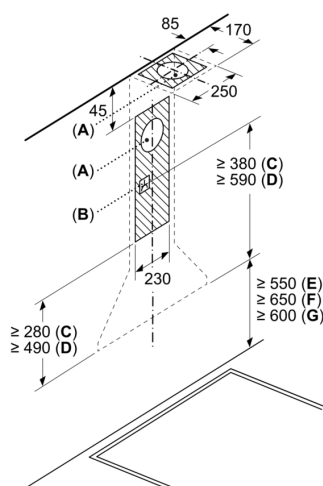

A: Exhaust-air outlet

B: Socket


C: Exhaust air

D: Circulated air

E: Electric

F: Gas - from upper edge of pan support

G: Electric - for Australia and New Zealand

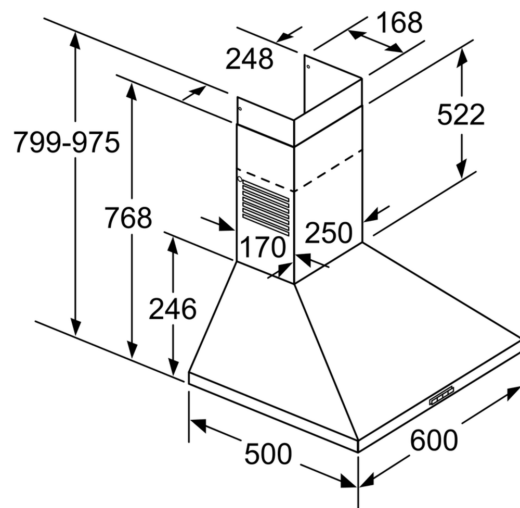

measurements in mm