


**Series 6, Gas cooktop, 60 cm,  
Tempered Glass, Black  
PPH6A6B21A**



**The tempered-glass gas cooktop with  
FlameSelect: achieve perfect cooking  
results thanks to nine precisely defined  
power levels.**

Product name/family: .....gas hob w integrated controls  
Built-in / Free-standing: ..... Built-in  
Energy input: .....Gas  
Total number of positions that can be used at the same time: ..... 4  
Type of control setting devices: .....Sword knobs  
Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm  
Width of the appliance: ..... 590 mm  
Dimensions (HxWxD): ..... 58x590x520 mm  
Dimensions of the packed product (HxWxD): ..... 141 x 651 x 578 mm  
Net weight: ..... 15.1 kg  
Gross weight: ..... 16.0 kg  
Residual heat indicator: ..... without  
Location of control panel: ..... Front  
Basic surface material: ..... Tempered Glass  
Color of surface: .....Black  
Color of frame: ..... Black  
Length electrical supply cord: ..... 100.0 cm  
EAN code: .....4242005446827  
Gas connection rating: ..... 8000 W  
Fuse protection: .....3 A  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz

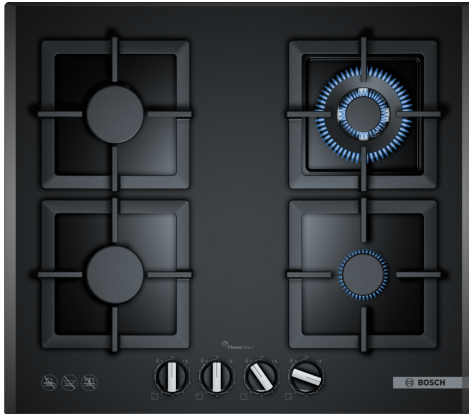

**Series 6, Gas cooktop, 60 cm,  
Tempered Glass, Black  
PPH6A6B21A**

**The tempered-glass gas cooktop with  
FlameSelect: achieve perfect cooking  
results thanks to nine precisely defined  
power levels.**

---

**Design**

- Black Tempered Glass surface
- Single pan supports, cast iron

**Usage convenience**

- FlameSelect (9 steps): precisely adjust the flame in nine defined and consistent levels.
- Sword control knobs: easily access knobs in front with strong grip for effortless turning.
- One-hand electronic ignition via controls: just push and turn the knob to ignite the flame.

**Burners and power**

- 4 Gas burners
- Left front: Standard burner up to 6.5Mj/h (depending on gas type)
- Left rear: Standard burner up to 6.5 Mj/h (depending on gas type)
- Right rear: Wok burner up to 13.6 Mj/h (depending on gas type)
- Right front: Economy burner up to 3.8 Mj/h (depending on gas type)

**Safety**

- Flame failure device fitted to each individual burner: prevents unwanted gas flow when flame goes out.

**Installation (gas types & measurements)**

- Preset of natural gas (10mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.
- Dimensions of the product (HxWxD mm): 58 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord 1 m cable with plug.

**Accessories**

- 1 x Wok attachment ring, cross support for espresso, simmer plate included