


**Serie | 2, HEADER2.Electric_Hob, 60
cm, Black
PKE611CA1A**

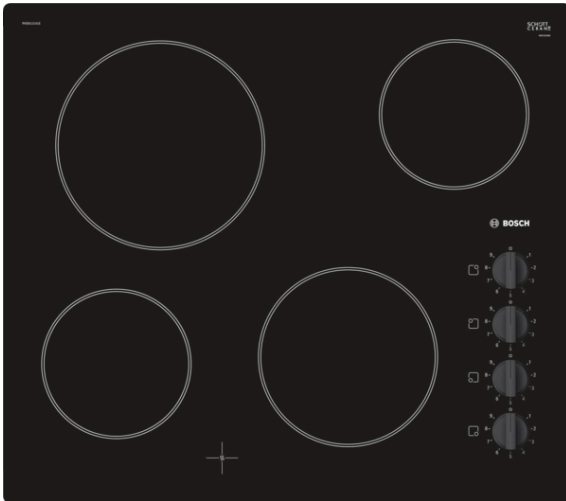

Optional accessories

HEZ390090 : Wok Set consisting of 3 Items

**The glass-ceramic radiant hob: makes
cooking and cleaning especially easy.**

- **Surface mounted knobs:** for easy setting of preferred cooking level.

Technical Data

Product name/family : Cooking zone ceramic
Construction type : Built-in
Energy input : Electric
Total number of positions that can be used at the same time : 4
Required niche size for installation (HxWxD) : 46 x 560-560 x 490-500 mm
Width of the appliance : 592 mm
Dimensions (HxWxD) : 46 x 592 x 522 mm
Dimensions of the packed product (HxWxD) : 100 x 750 x 590 mm
Net weight : 7.6 kg
Gross weight : 8.4 kg
Residual heat indicator : separate
Location of control panel : Hob lateral
Basic surface material : Ceramic
Color of surface : Black
Approval certificates : Australia Standards, CE, VDE
EAN code : 4242002975573
Electrical connection rating : 6600 W
Voltage : 220-240 V
Frequency : 60; 50 Hz



4 242002 975573

**Serie | 2, HEADER2.Electric_Hob, 60 cm,
Black
PKE611CA1A**

**The glass-ceramic radiant hob: makes
cooking and cleaning especially easy.**

- 60 cm: space for 4 pots or pans.

Flexibility of cooking zones

- Cooking zone front left: 145 mm, 1.2 KW
- Cooking zone rear left: 210 mm, 2.2 KW
- Cooking zone rear right: 145 mm , 1.2 KW
- Cooking zone front right: 180 mm, 2 KW

Usage convenience

- Sword knob: control the power with mounted knobs.
- 9-stage variable power setting for each cooking zone:
precisely adapt the heat with 9 power levels.

Design

- Frameless

Safety


- Residual heat indicator: indicates which cooking zones are
still hot.

Installation

- Dimensions of the product (HxWxD mm): 46 x 592 x 522
- Required niche size for installation (HxWxD mm) : 46 x 560 x
(490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 6.6 KW

**Serie | 2, HEADER2.Electric_Hob, 60 cm,
Black
PKE611CA1A**

measurements in mm

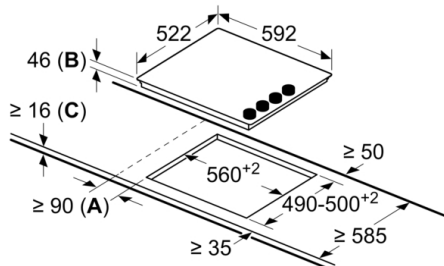

- A:** Minimum distance from the hob cut-out to the wall.
- B:** Recessed depth
- C:** With fitted oven underneath min. 20, possibly more; see space requirements for the oven.